


AREA ELASTIC SPORTS FLOOR A4

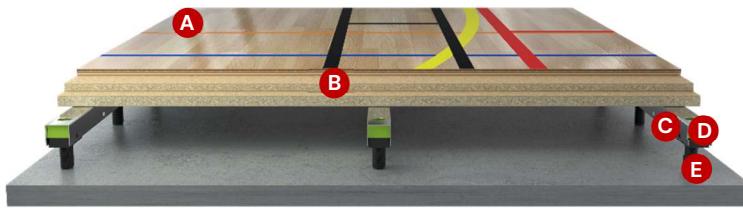

Adjustable height: 105–485 mm. Natural frequency = 25 Hz.

Granab subfloor system AREA ELASTIC SPORTS FLOOR A4 A3 is constructed according to the above section. The system is very resistant to high loads and meets the requirements of C4 according to Eurocode EN1991-1-1. The system can be installed on uneven surfaces and the installation height is easily adjusted with the adjustment screws.

The floor can easily be combined with mechanical ventilation against moisture, mould and radon.

A sports mat with combi-elastic properties or a sports parquet, for example, can be laid on top of the double floor chipboard. The highest requirement for combi-elastic sports floors according to EN Norm 14904:2006 Type C4 is easily achieved with this system.

The systems natural frequency = 25 Hz.

A SPORTS PARQUET, 2 LOCK TARKETT

B FLOORBOARDS
16 mm floorboard, 22mm floorboard

C GIRDER
Granab system 7000 N25 Sport.
Galvanised steel.

D DAMPENING ELEMENT
25m mm sylodyn

E BLOCK WITH
ADJUSTMENT SCREW
105–485 mm.

EXAMPLE OF TEST RESULTS WITH SPORTS PARQUET, 2 LOCK TARKETT

Measurement	Test results	Requirements according to EN
Shock absorption	59 %	55-75
Vertical deformation	2,5 mm	2,3-5,0 mm
Vertical ball behaviour	95 %	Min 90 %



CERTIFYING
KONTROLL



Address
Åkerigatan 2 | S-447 37 Vårgårda | Sweden



E-mail
epost@granab.se



Telephone
+46 (0) 322-66-76-50